

transport spécial national et international
levage - manutention - entreposage

route du Molliau
CH - 1131 TOLOCHENAZ

tél. +41 (0)21 804 94 94
fax +41 (0)21 804 94 10

www.friderici.com



GRUE 13 + 14

SPIERINGS

SK1265-AT6


Grue mobile de construction

Mobilbaukrane

1



10 tonnes



12 x 6 x 10



60 mètres



30°







52 mètres



72 tonnes



DIMENSIONS - ABMESSUNGEN

2

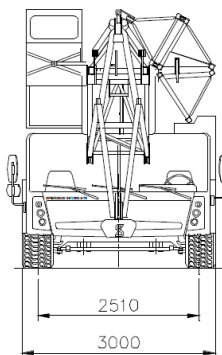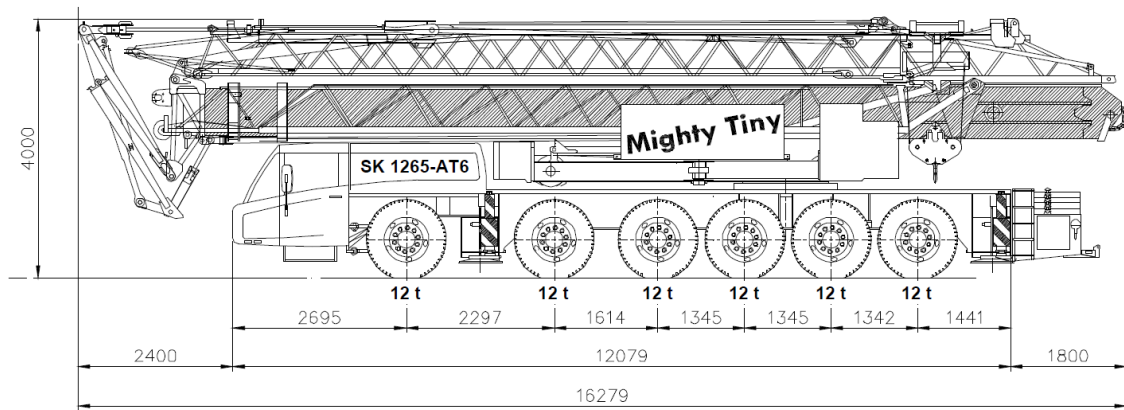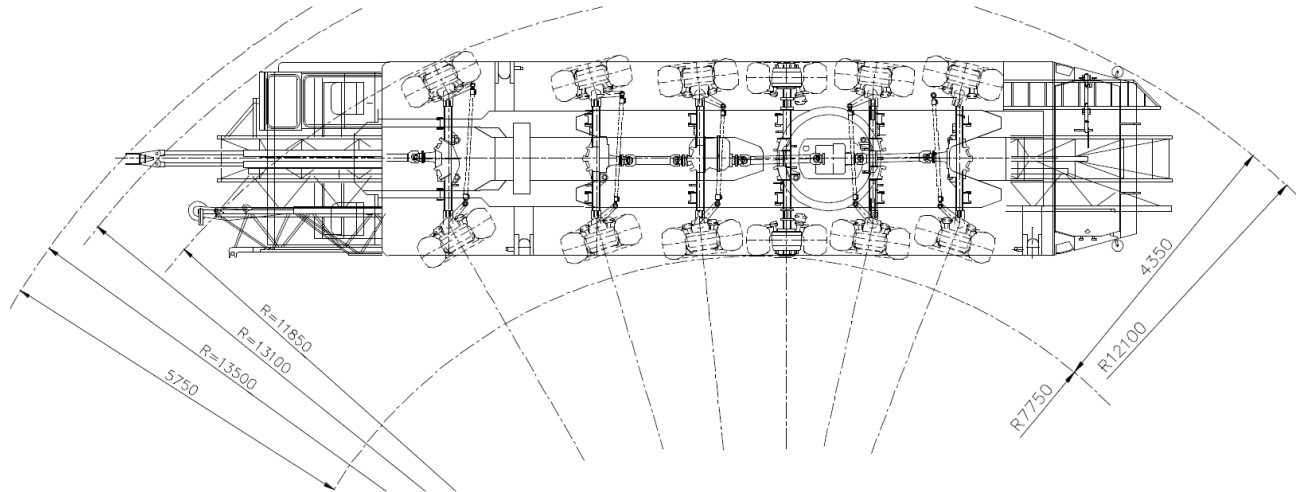


SK1265-AT6

CARACTERISTIQUES-DATEN

Speeds		Jib horizontal / jib 30° luffed		
	m/min	kg		0 - 70 m/min
	15	10000		0-0,7 r/min
	30	5000		
	45	2500		
	75	0		

SEQUENCE DE MONTAGE AUFSTELLVORGANG


3

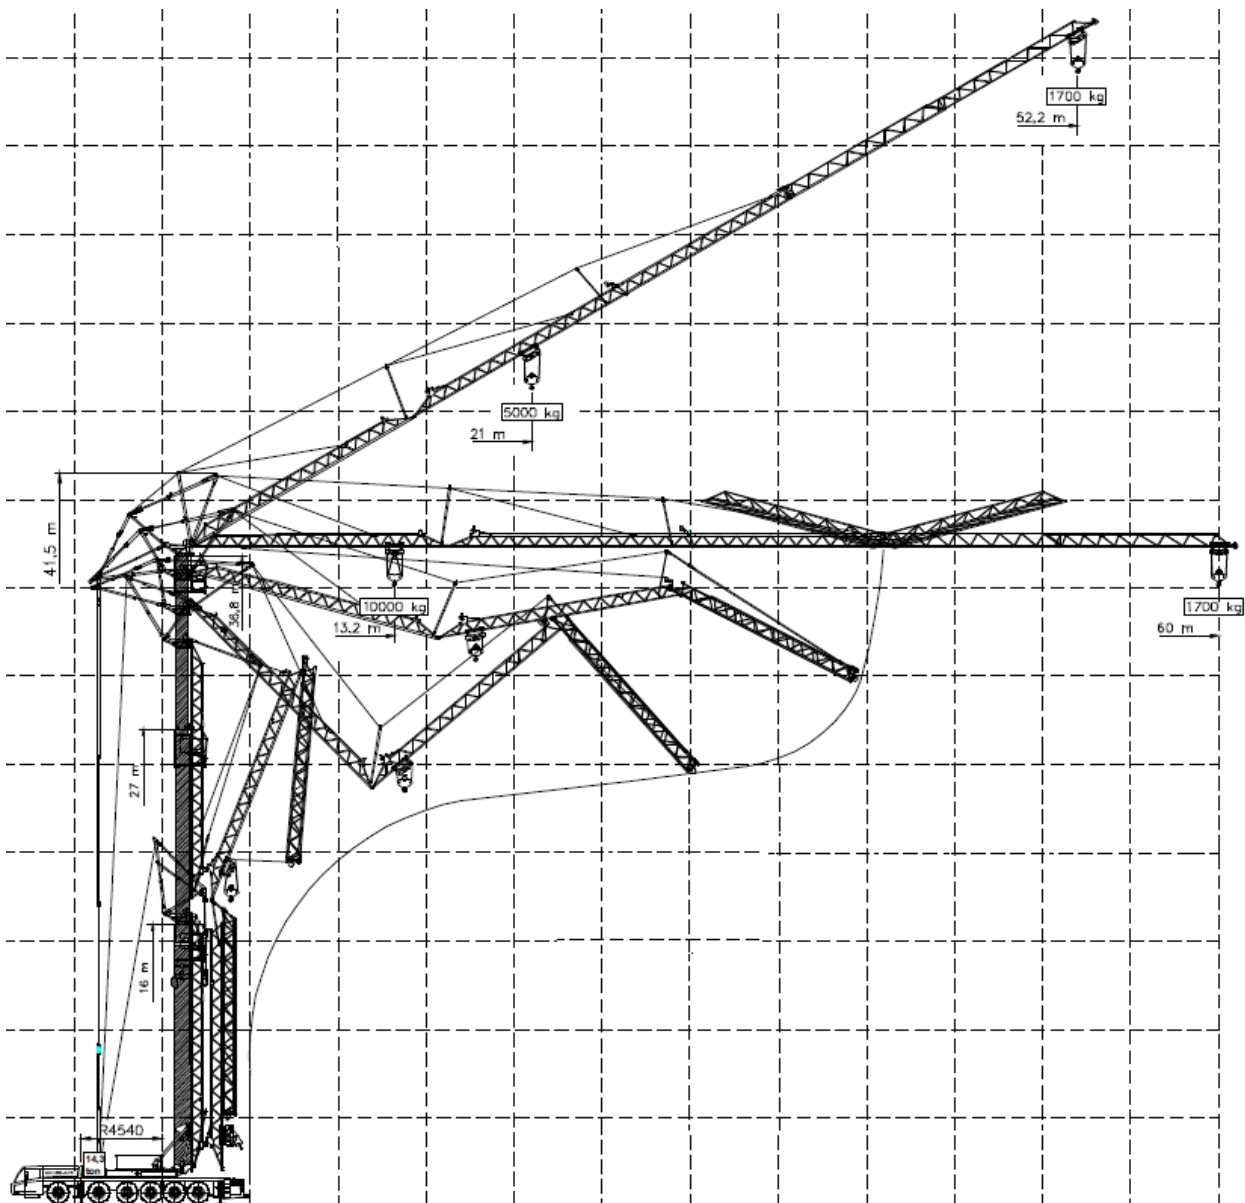

SK1265-AT6

BASE DE CALAGE - ABSTÜTZBASIS

4

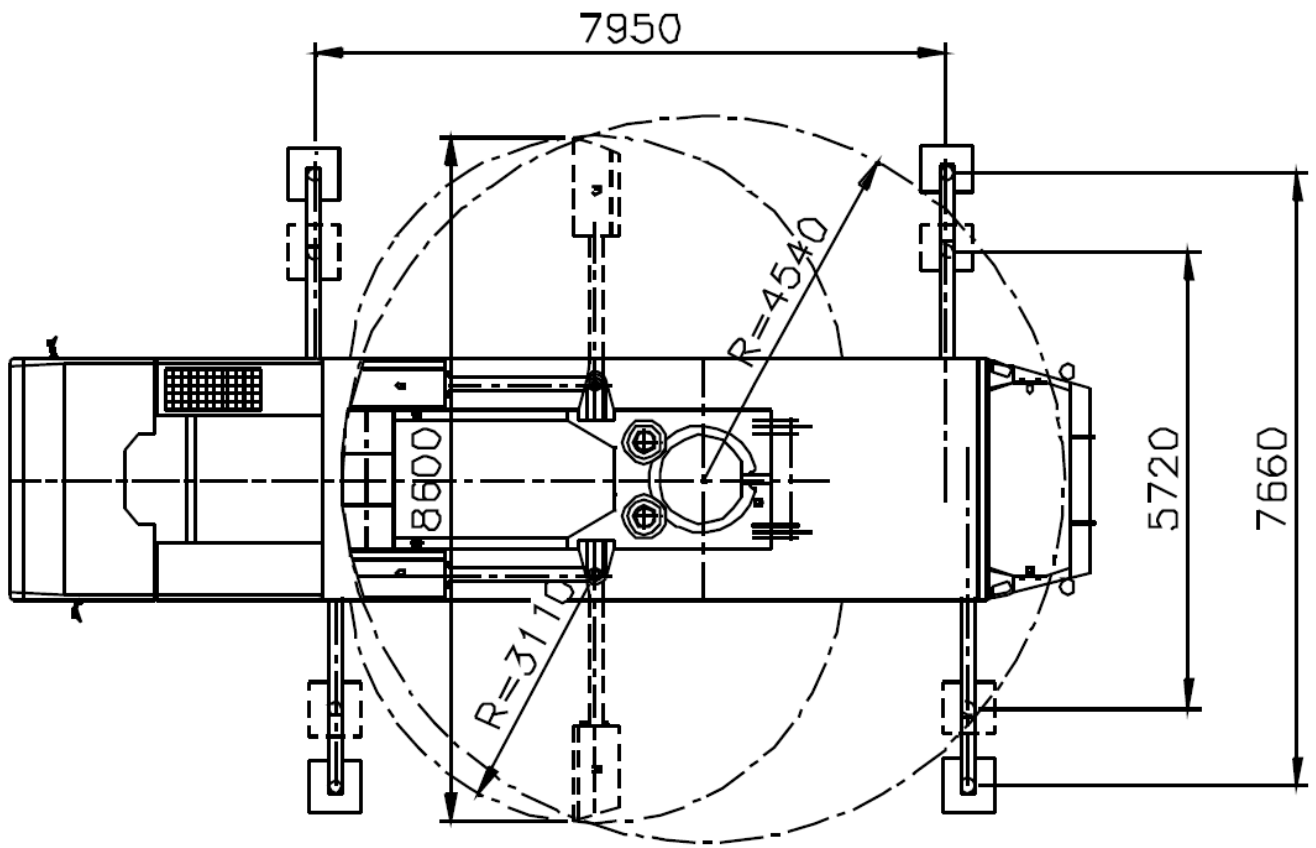

SK1265-AT6

CARACTERISTIQUES-DATEN

Lifting chart

Outrigger spread : 7,95 m x 7,66 m

(up to wind force 6 on the beaufort scale)

Jib horizontal		hook height 25,2 / 35 m (height under the jib 27,4 / 37,2 m)												radius (m)											
		13,2	15	20	25	30	35	40	45	50	55	60													
10000		9335	7985	6965	5830	5000	4560	4190	3870	3590	3350	3130	2940	2770	2615	2475	2345	2230	2125	2025	1935	1850	1775	1700	
		10000	8610	7445	6545	5830	5255	4775	4370	4025	3725	3465	3235	3035	2855	2690	2545	2410	2290	2175	2075	1980	1890	1810	1735
36	Jib 30° luffed	46,2	48,5	51,35	54,25	57,15	60	62,9	64,2	hook height (m)															
3,5		21	25	30	35	40	45	50	52,2	radius (m)															
5000		4740	4285	3905	3580	3305	3065	2855	2665	2500	2350	2220	2095	1985	1885	1795	1700								
		5000	4500	4085	3735	3440	3180	2955	2755	2580	2425	2285	2155	2040	1935	1840	1750								

Lifting chart

Outrigger spread : 7,95 m x 5,72 m

(up to wind force 6 on the beaufort scale)

		hook height 25,2 / 35 m (height under the jib 27,4 / 37,2 m)																											
																													
		3,5	8,1	10	15	20	25	30	35	40	45	50	55	60	radius (m)														
10000																													
			10000	7685	6695	5085	4325	3755	3305	2945	2650	2405	2195	2015	1860	1725	1605	1495	1400	1315	1235	1165	1100	1040	985	930	885	840	800
			8780	6825	5560	4675	4020	3520	3120	2795	2525	2295	2105	1935	1790	1660	1550	1445	1355	1275	1200	1130	1065	1010	955	910	860	820	
36	Jib 30° luffed				41,3	42,7	45,6	48,5	51,35	54,25	57,15	60	62,9	64,2	hook height (m)														
		3,5	12,5	15	20	25	30	35	40	45	50	52,2	radius (m)																
5000																													
			5000	4355	3700	3205	2815	2505	2250	2035	1855	1700	1565	1445	1340	1250	1165	1090	1025	960	905	850	800	load (m)					
			4770	4005	3435	3000	2655	2370	2140	1945	1775	1630	1505	1395	1295	1205	1125	1055	990	930	880	830							

6

CAPACITES DE LEVAGE - TRAGLASTEN	
----------------------------------	--

Lifting chart

Outrigger support base : 7,95 m x 7,66 m

Jlb horizontal

hook height 25,2 / 35 m (height under the jlb 27,4 / 37,2 m)

3,5	13,57	15	20	25	30	35	40	45	50	52	Radius (m)									
10000	9640	8245	7195	6370	5710	4715	4330	4000	3715	3465	3240	3045	2685	2705	2665	2430	2310	2200	2100	Load (kg)
	10000	8890	7685	6025	5430	4835	4515	4180	3855	3585	3350	3140	2955	2785	2635	2595	2370	2255	2150	
36	Jlb 30° luffed	46,5	48,5	51,35	54,25	57,15	60,2	Hookheight (m)												
3,5		21,6	25	30	35	40	45,3	Radius (m)												
5000		4900	4430	4035	3705	3420	3170	2850	2780	2590	2435	2295	2170	2100	Load (m)					
		5000	4655	4225	3865	3555	3290	3055	2855	2670	2510	2365	2235	2115						

Lifting chart

Outrigger support base : 7,95 m x 5,72 m

Jlb horizontal

hook height 25,2 / 35 m (height under the jlb 27,4 / 37,2 m)

3,5	8,45	10	15	20	25	30	35	40	45	50	52	Radius (m)												
10000	10000	8980	6460	5360	4560	3960	3490	3115	2805	2545	2325	2135	1975	1830	1700	1590	1490	1395	1315	1240	1170	1110	1050	Load (kg)
	9240	7190	5660	4930	4240	3715	3295	2950	2670	2430	2225	2050	1900	1765	1645	1535	1440	1355	1275	1205	1140	1080		
36	Jlb 30° luffed	41,6	45,6	48,5	51,35	54,25	57,15	60,2	Hookheight (m)															
3,5		13	15	20	25	30	35	40	45,3	Radius (m)														
5000		4595	3905	3385	2875	2650	2380	2155	1965	1805	1660	1535	1430	1330	1240	1165	1090	1050	Load (m)					
		5000	4225	3825	3170	2805	2510	2265	2060	1880	1730	1600	1480	1375	1285	1200	1125	1060						

changes subject to modifications

121-00126151