

Grue mobile de construction

MK 140



grue 15



8 to



10x6x10



60 to



65 m



70°




94.4 m

Friderici Spécial
A la réponse à vos besoins

MK 140

Caractéristiques techniques

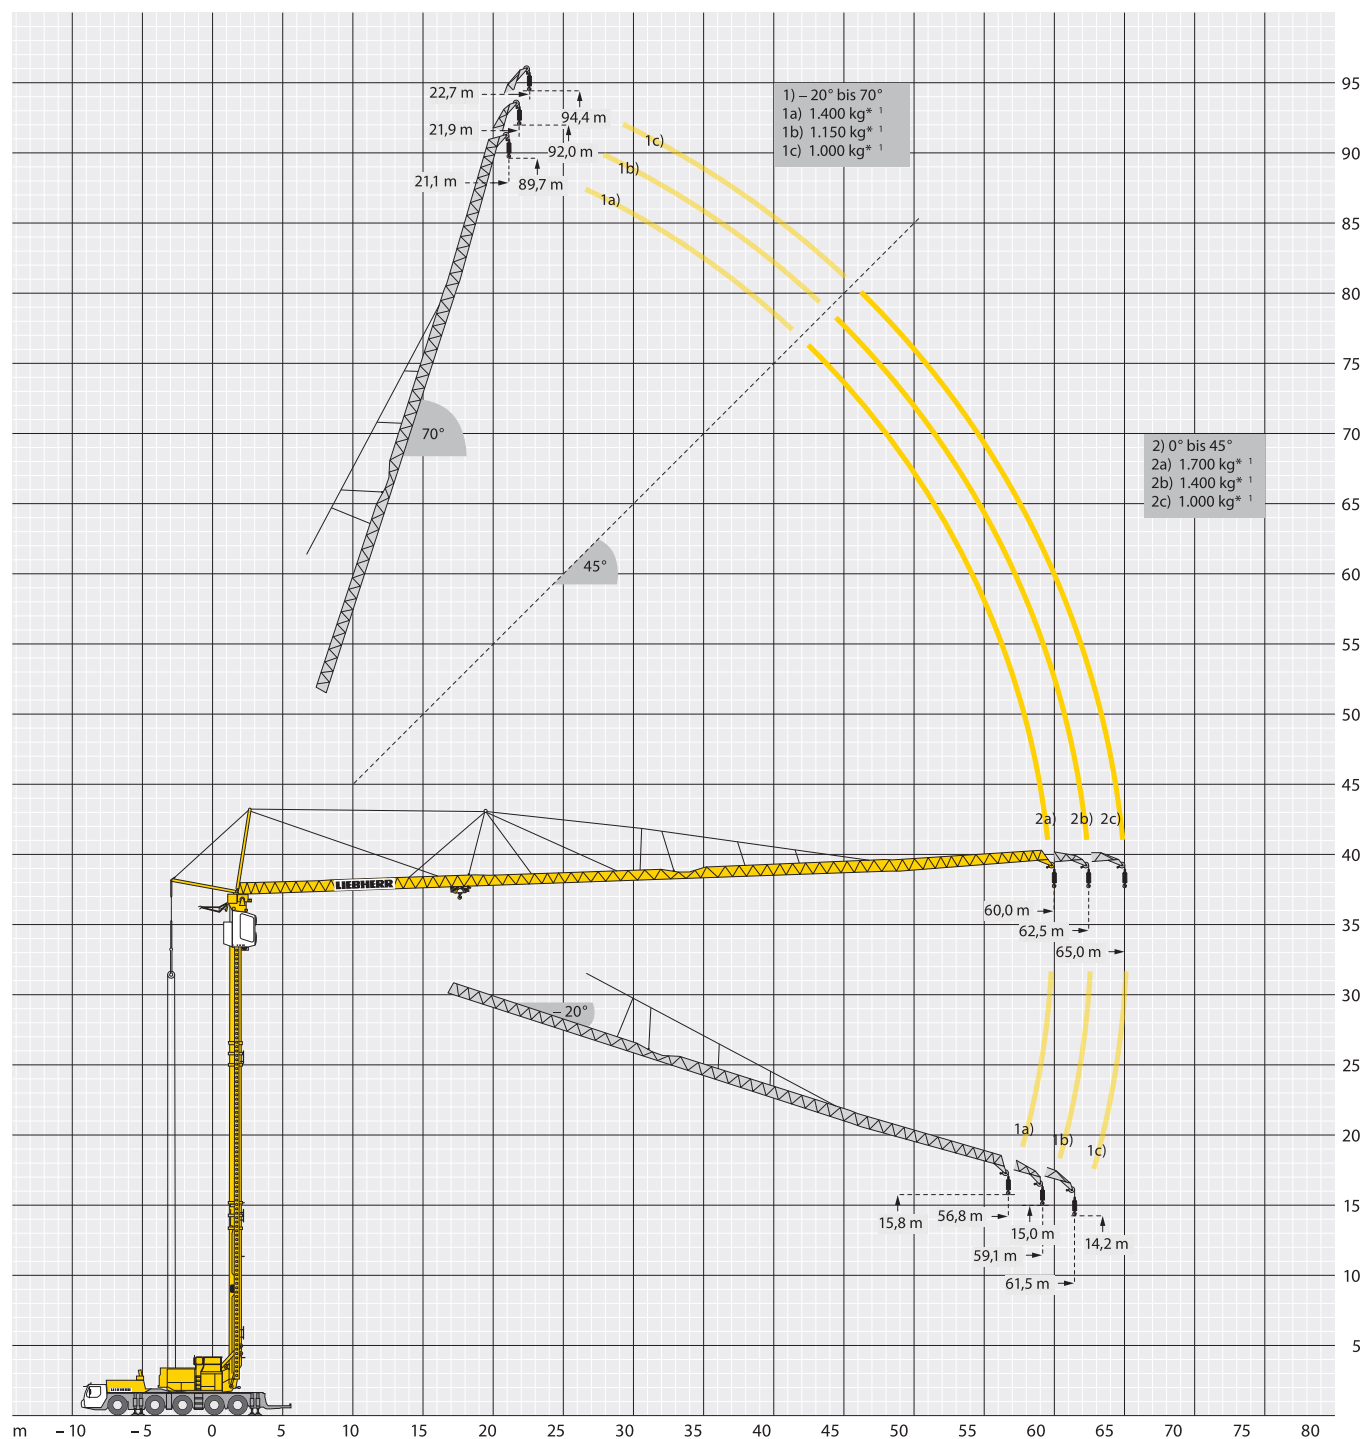

* Charges avec lest additionnel 9,0 to

MK 140

Capacités de levage



8,20 x 8,25 m

					m																							
			m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5				
0°	58,5		3,3 - 10,4	8000	8000		6780	5250	4260	3560	3050	2660	2340	2090	1880	1700	1550	1420	1300	1200	1110	1030	1000					
			3,3 - 8,1	8000	8000	7080	5100	3950	3200	2670	2280	1980	1740	1540	1380	1240	1120	1020	930	860	790	720	700					
	Plus*2		3,2 - 12,0	8000	8000			6080	4870	4040	3440	2980	2620	2330	2090	1880	1710	1570	1440	1320	1230	1140	1100					
15°	56,5		3,2 - 34,0	1800	1800										1670	1500	1360	1240	1130	1040	960	900						
			3,0 - 26,5	1800	1800								1750	1530	1340	1190	1060	950	860	780	710	640	600					
30°	50,7		3,0 - 12,0	6000	6000			4610	3720	3090	2630	2280	2000	1770	1590	1430	1290	1180	1080	1000								
			2,7 - 9,0	6000	6000		4280	3290	2640	2190	1860	1600	1390	1220	1080	970	870	780	710	650								
45°	41,5		2,7 - 31,0	1800	1800										1650	1460	1310	1200										
			2,7 - 25,0	1800	1800								1610	1390	1210	1060	940	850										

kg



6,95 x 8,25 m


				m																							
			m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5			
0°	58,5		3,3 - 6,5	8000	8000		5430	3870	2970	2380	1970	1670	1430	1250	1100	970	870	770	700	630	570	510	470	450			
			3,3 - 4,1	8000	8000	5180	3250	2320	1760	1390	1130	940	790	670	570	490	420	360	310	270	230	190	160	150			
15°	56,5		3,2 - 20,0	1800	1800						1680	1410	1200	1030	900	790	690	610	540	480	430	380	350				
			-	-	-																						
30°	50,7		3,0 - 7,0	6000	6000		4440	3150	2400	1910	1570	1320	1120	960	840	730	640	560	500	440	400						
			-	-	-																						
45°	41,5		2,7 - 19,0	1800	1800						1570	1300	1100	940	810	700	610	550									
			-	-	-																						

kg

= max. 14,0 m/sec = max. 20,0 m/sec

MK 140

Capacités de levage avec ballast 3 to



					m																				
			m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5	
0°	58,5		3,3 - 12,0	8000	8000				6240	5090	4280	3680	3220	2850	2550	2300	2080	1900	1750	1610	1490	1380	1290	1250	
			3,3 - 9,85	8000	8000			6470	5070	4150	3500	3010	2630	2320	2070	1870	1690	1540	1410	1300	1200	1110	1030	1000	
	Plus*2		3,2 - 13,5	8000	8000				7050	5690	4750	4060	3540	3130	2800	2530	2300	2100	1930	1790	1660	1540	1440	1400	
15°	56,5		3,2 - 41,0	1800	1800														1740	1600	1480	1370	1270	1200	
			3,0 - 33,5	1800	1800												1640	1480	1350	1230	1130	1040	960	900	
30°	50,7		3,0 - 14,0	6000	6000				5550	4510	3790	3250	2830	2500	2230	2000	1820	1650	1510	1390	1300				
			2,7 - 11,5	6000	6000			5710	4450	3610	3030	2590	2250	1980	1760	1580	1420	1290	1170	1080	1000				
45°	41,5		2,7 - 37,5	1800	1800														1700	1550					
			2,7 - 31,0	1800	1800												1650	1460	1310	1200					



				m																				
			m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5
0°	58,5		3,3 - 8,35	8000	8000	7330	5260	4070	3290	2740	2330	2020	1770	1570	1400	1260	1140	1030	940	860	790	720	700	
			3,3 - 6,1	8000	8000	5200	3770	2920	2360	1960	1660	1430	1250	1100	970	870	780	700	630	570	520	470	450	
15°	56,5		3,2 - 27,5	1800	1800										1610	1420	1260	1130	1020	920	840	760	700	650
			3,2 - 20,0	1800	1800								1680	1410	1200	1030	900	790	690	610	540	480	430	380
30°	50,7		3,0 - 9,5	6000	6000			4550	3490	2810	2330	1970	1700	1480	1300	1160	1030	930	840	760	700			
			3,0 - 6,5	6000	6000	4080	2900	2210	1760	1440	1200	1020	870	760	660	570	500	440	390	350				
45°	41,5		2,7 - 25,5	1800	1800										1660	1440	1260	1110	990	900				
			2,7 - 19,0	1800	1800								1570	1300	1100	940	810	700	610	550				



				m																							
			m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5			
0°	58,5		3,3 - 5,0	8000	8000	6470	4040	2880	2200	1750	1440	1200	1020	870	760	660	580	500	440	390	340	300	260	250			
			-	-																							
15°	56,5		-	-																							
			-	-																							
30°	50,7		-	-																							
			-	-																							
45°	41,5		2,7 - 16,0	1800	1800					1530	1240	1020	850	720	610	520	450	400									
			-	-																							

 = max. 14,0 m/sec  = max. 20,0 m/sec

MK 140

Capacités de levage avec ballast 6 to

+6 t



8,20 x 8,25 m

				m																					
		m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5		
0°	58,5		3,3 - 13,4	8000	8000			7110	5880	4990	4320	3800	3380	3040	2760	2520	2310	2130	1970	1830	1710	1600	1550		
			3,3 - 11,5	8000	8000		7660	6090	5030	4270	3700	3250	2890	2590	2350	2140	1960	1800	1660	1540	1440	1340	1300		
	Plus*2		3,2 - 14,4	8000	8000			7670	6340	5390	4680	4120	3670	3300	3000	2740	2510	2320	2150	2000	1870	1750	1700		
15°	56,5		3,2 - 50,0	1800	1800																1750	1630	1550		
			3,0 - 42,0	1800	1800														1650	1530	1420	1320	1250		
30°	50,7		3,0 - 16,0	6000	6000				5280	4460	3840	3370	2990	2680	2420	2200	2010	1850	1710	1600					
			2,7 - 14,0	6000	6000			5550	4510	3790	3250	2830	2500	2230	2000	1820	1650	1510	1390	1300					
45°	41,5		2,7 - 39,0	1800	1800													1700							
			2,7 - 36,0	1800	1800											1620	1500								

kg



6,95 x 8,25 m

				m																				
		m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5	
0°	58,5		3,3 - 10,5	8000	8000		6890	5380	4390	3690	3160	2760	2440	2180	1960	1780	1620	1480	1360	1260	1170	1080	1050	
			3,3 - 8,35	8000	8000	7360	5360	4170	3390	2840	2430	2110	1850	1650	1470	1330	1200	1090	1000	920	840	780	750	
15°	56,5		3,2 - 36,5	1800	1800											1650	1500	1370	1250	1150	1060	1000		
			3,2 - 28,5	1800	1800									1680	1490	1330	1200	1080	980	890	820	750	700	
30°	50,7		3,0 - 12,5	6000	6000			4870	3950	3300	2820	2450	2160	1920	1720	1560	1410	1290	1180	1100				
			3,0 - 9,5	6000	6000		4550	3490	2810	2330	1970	1700	1480	1300	1160	1030	930	840	760	700				
45°	41,5		2,7 - 33,5	1800	1800										1630	1470	1350							
			2,7 - 26,5	1800	1800								1750	1520	1330	1170	1040	950						
																								

kg



5,95 x 8,25 m

				m																									
		m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5						
0°	58,5		3,3 - 7,1	8000	8000		6110	4400	3410	2750	2290	1940	1680	1470	1290	1150	1030	920	830	760	690	630	570	550					
			3,3 - 4,8	8000	8000	6340	4110	2990	2320	1860	1540	1300	1110	960	840	730	650	570	510	450	400	350	310	300					
15°	56,5		3,2 - 23,5	1800	1800							1750	1500	1310	1150	1020	910	810	730	660	590	540	500						
			-	-																									
30°	50,7		3,0 - 8,25	6000	6000		5440	3930	3040	2450	2040	1730	1490	1300	1140	1010	900	800	720	650	600								
			-	-																									
45°	41,5		2,7 - 23,5	1800	1800							1750	1490	1290	1130	990	880	800											
			2,7 - 16,0	1800	1800					1530	1240	1020	850	720	610	520	450	400											

kg

= max. 14,0 m/sec = max. 20,0 m/sec

MK 140

Capacités de levage avec ballast 9 to

+9 t



8,20 x 8,25 m

				m																						
			m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5		
0°	58,5		3,3 - 13,4	8000	8000				7290	6220	5400	4750	4230	3790	3420	3110	2830	2600	2390	2200	2040	1890	1760	1700		
			3,3 - 12,0	8000	8000				6630	5630	4870	4270	3780	3380	3050	2760	2520	2310	2120	1950	1800	1670	1550	1500		
	Plus*2		3,2 - 14,4	8000	8000				7706	6504	5613	4925	4379	3934	3565	3254	2988	2758	2558	2381	2224	2084	1958	1900		
15°	56,5		3,2 - 54,0	1800	1800																			1700		
			3,0 - 50,0	1800	1800																		1750	1630	1550	
30°	50,7		3,0 - 16,0	6000	6000				5320	4540	3940	3480	3100	2790	2530	2310	2120	1960	1810	1700						
			2,7 - 14,0	6000	6000				5610	4680	4000	3490	3080	2740	2470	2240	2040	1880	1730	1600	1500					
45°	41,5		2,7 - 39,0	1800	1800													1700								
			2,7 - 36,0	1800	1800												1620		1500							

kg



6,95 x 8,25 m

				m																							
			m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5			
0°	58,5		3,3 - 12,7	8000	8000				6650	5430	4570	3930	3440	3050	2730	2460	2240	2040	1880	1730	1610	1490	1390	1350			
			3,3 - 10,5	8000	8000				6930	5440	4460	3760	3230	2830	2510	2240	2020	1840	1680	1540	1420	1310	1220	1130	1100		
15°	56,5		3,2 - 44,0	1800	1800														1740		1610	1480	1380	1300			
			3,2 - 36,5	1800	1800														1650		1500	1370	1250	1150	1060	1000	
30°	50,7		3,0 - 15,0	6000	6000				4860	4070	3490	3040	2680	2390	2150	1950	1780	1630	1500	1400							
			3,0 - 12,0	6000	6000				4660	3780	3160	2700	2350	2070	1840	1650	1490	1350	1230	1130	1050						
45°	41,5		2,7 - 39,0	1800	1800														1700								
			2,7 - 33,5	1800	1800														1630	1470	1350						

kg




5,95 x 8,25 m

				m																					
				m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5
0°	58,5		3,3 - 9,1	8000	8000				5890	4590	3730	3130	2680	2330	2050	1830	1640	1480	1340	1220	1120	1030	950	880	850
			3,3 - 6,8	8000	8000		5960	4390	3440	2800	2350	2010	1740	1530	1360	1210	1090	980	890	810	740	680	620	600	
15°	56,5		3,2 - 31,0	1800	1800											1660	1490	1340	1210	1110	1010	930	850	800	
			3,2 - 23,5	1800	1800								1750	1500	1310	1150	1020	910	810	730	660	590	540	500	
30°	50,7		3,0 - 10,5	6000	6000				5180	4040	3290	2760	2360	2050	1800	1600	1430	1290	1170	1060	970	900			
			3,0 - 7,75	6000	6000		5080	3680	2850	2300	1910	1610	1390	1210	1060	940	830	740	670	600	550				
45°	41,5		2,7 - 30,5	1800	1800											1620	1450	1300	1200						
			2,7 - 23,5	1800	1800								1750	1490	1290	1130	990	880	800						

kg

= max. 14,0 m/sec = max. 20,0 m/sec



MA TÊTE AUSSI
SE PROTÈGE



FRIDERICI.com | T+41 21 804 94 94
ROUTE DU MOLLIAU 30 | 1131 TOLOCHENAZ (SUISSE)

FRIDERICI
SPECIAL 